




# Vizable Technologies

Be Seen. Be Safe. Enjoy the Ride...

## SB-KLR Installation

Before starting the installation please verify the operation of the brake lights.

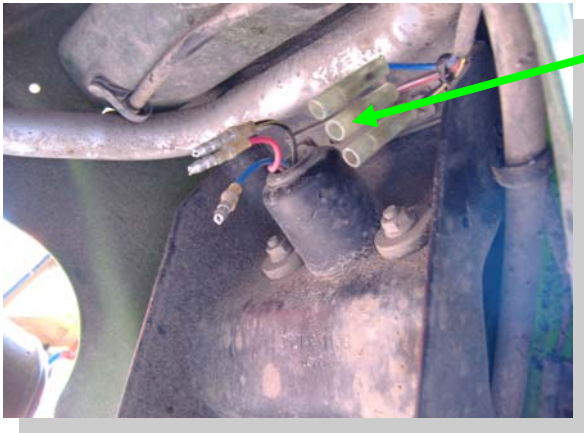

### STEP 1:

Locate and disconnect the 3 bullet type connectors that interfaces the wire harness to the rear lamp assembly.



### STEP 2:

Attach the SB-KLR unit in series between the 3 connectors. Secure with supplied tie-wraps. Test the brake lights for functionality. Ride it, and tell all your friends about us!

*NOTE: Picture shown is of prototype unit. Actual unit includes black PVC wire tubing.*



Questions? Goto [www.vizi-tec.com](http://www.vizi-tec.com)