




# Vizable Technologies

Be Seen. Be Safe. Enjoy the Ride...

## SB-VespaGTS Installation

Before starting the installation please verify the operation of the brake lights.

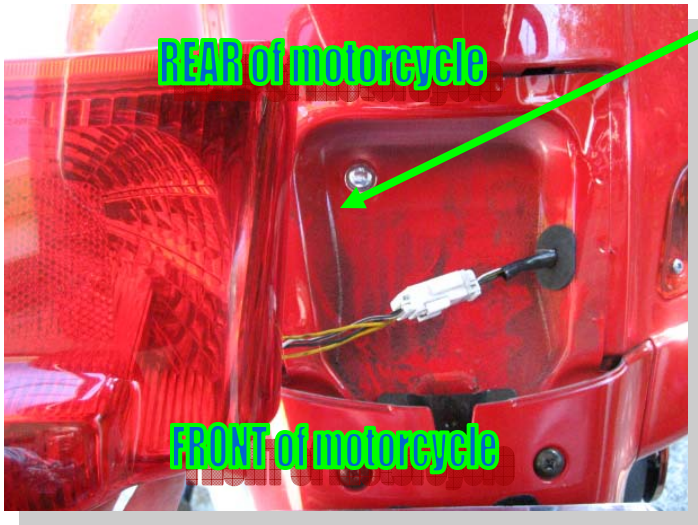


### STEP 1:

Remove the taillight assembly to expose the OEM connectors. Disconnect(open) this connector set.



### STEP 2:

Plug the SB-VespaGTS flasher in series between the above connectors. (The connectors are keyed such that installation can only be performed one way.)

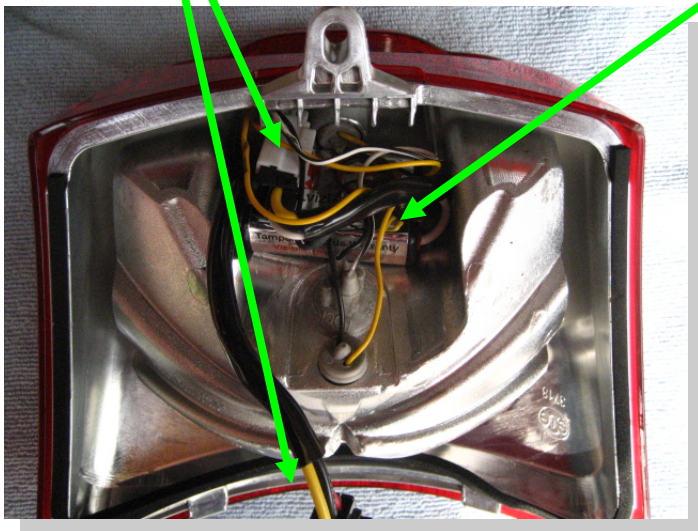

### STEP 3:

Tuck and secure the SB-VespaGTS flasher inside the taillight assembly and secure with supplied tie-wraps as shown. Reinstall the taillight assembly. (See Datasheet for more installation help). Test for functionality. Ride it, and tell all your friends about us!



Questions? Goto [www.vizi-tec.com](http://www.vizi-tec.com)