




SB-STsABS Installation


Before starting the installation please verify the operation of the turn signal indicators and brake lights.

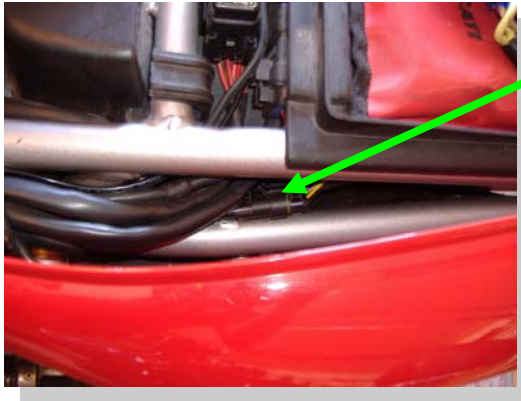

STEP 1:

Per the owner's manual, remove the rear seat compartment to expose the 4-pin connector and...

disconnect the 4-pin connector

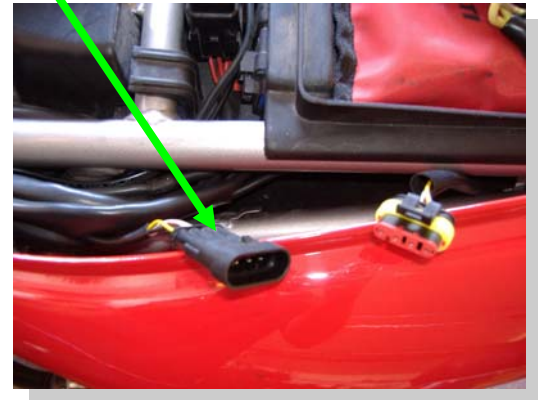


(Pictures taken while standing on left side of motorcycle)

STEP 2:

Plug the SB-STsABS unit in series between the 4-pin connector and route wires as shown.

Alternate location to install the SB-STsABS unit.

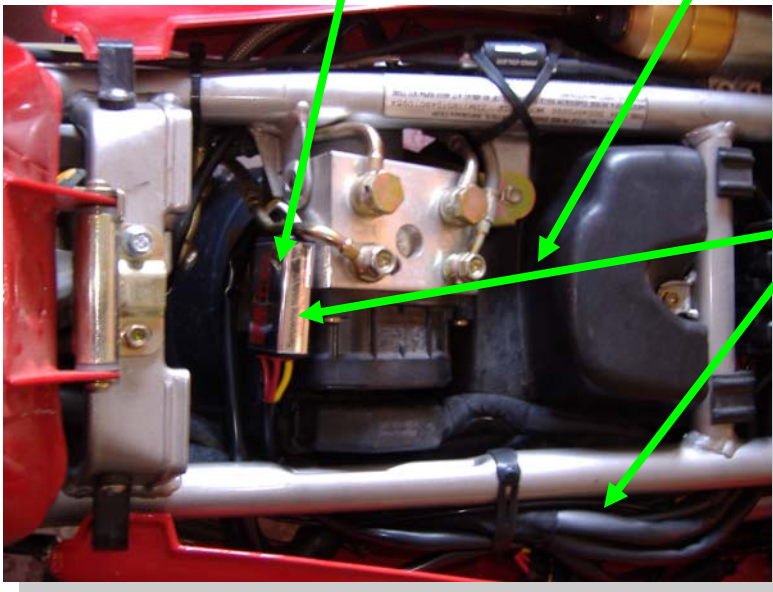

STEP 3:

Secure the SB-STsABS unit with supplied tie-wraps and double sided tape as shown.

Test for functionality of the turn signals and brake lights. Reinstall seat. Done!



Questions? Goto www.vizi-tec.com