




SB-Rebel250 Installation



Before starting the installation please verify the operation of the brake lights.

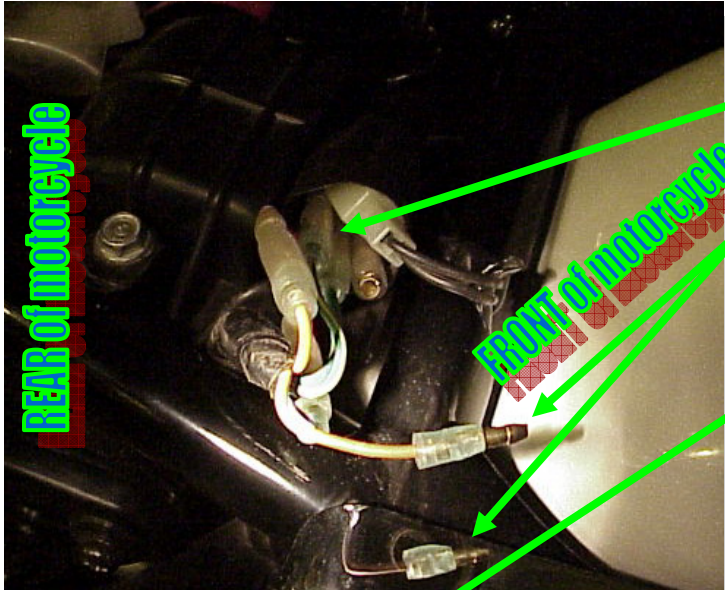

STEP 1:

Per owners manual. Remove the seat assembly to expose the OEM connectors(3 each) that interfaces the main harness to the rear brake light module.

Disconnect (open) these connectors. (Shown only 2)


STEP 2:

Plug the SB-Rebel250 flasher in series between the above connectors. (The connectors are keyed such that installation can only be performed one way.)


Vizi-tec

Input (Red)	=	Main harness (Green/Yellow)
+12V (Yellow)	=	+12V (Brown)
Ground (Black)	=	Common (Green)
Output (White)	=	Output (Green/Yellow)

Honda Rebel

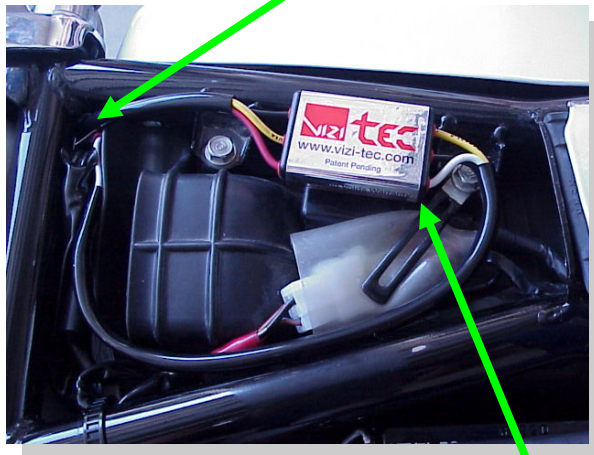

Option A: Location

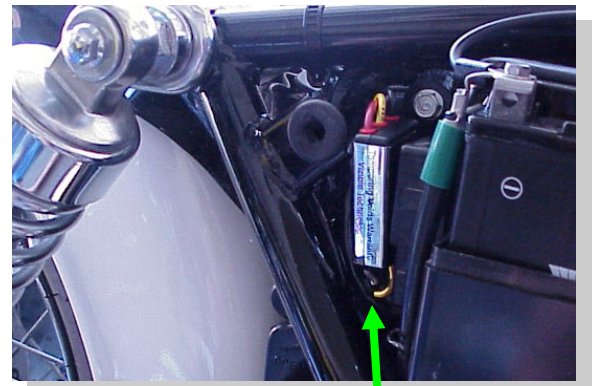

Option B: Install

STEP 3:

Tuck and secure the SB-Rebel250 flasher on top of the opened seat compartment or by side of the battery and secure with supplied tie-wraps as shown. Reinstall the seat assembly. (See Datasheet for more installation help at vizi-tec.com). Test for functionality.

Ride it, and tell all your friends about us!